




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04B 1/707, 7/02, 7/26, 7/005		A1	(11) International Publication Number: WO 00/33472
			(43) International Publication Date: 8 June 2000 (08.06.00)
(21) International Application Number: PCT/US99/23969 (22) International Filing Date: 14 October 1999 (14.10.99) (30) Priority Data: 09/204,734 3 December 1998 (03.12.98) US (71) Applicant: ERICSSON, INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, CA 27709 (US). (72) Inventor: BOTTOMLEY, Gregory, E.; 100 Merlot Court, Cary, NC 27511 (US). (74) Agents: BIGEL, Mitchell, S. et al.; Myers, Bigel, Sibley, & Sajovec, P.A., P.O. Box 37428, Raleigh, NC 27627 (US).			(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: DIGITAL RECEIVERS AND RECEIVING METHODS THAT SCALE FOR RELATIVE STRENGTHS OF TRAFFIC AND PILOT CHANNELS DURING SOFT HANDOFF

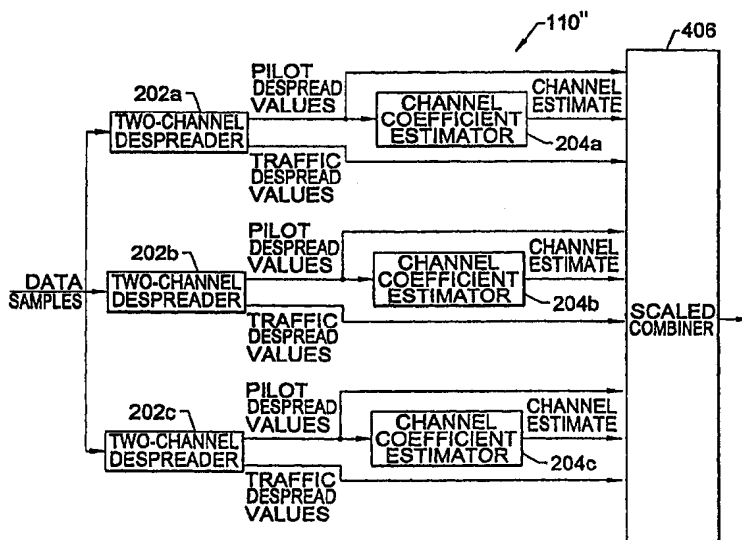

(57) Abstract

Digital receivers and receiving methods scale for relative strengths of traffic and pilot channels during soft handoff. In particular, spread spectrum signals are processed from traffic channels and pilot channels by receiving data samples from traffic channels and pilot channels. Detection statistics are obtained from the received data samples that correspond to information symbols while accounting for the relative strengths of the traffic channels and the pilot channels. The detection statistics are preferably obtained by performing Rake combining while accounting for the relative strengths of the traffic channels and the pilot channels.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DIGITAL RECEIVERS AND RECEIVING METHODS THAT SCALE FOR RELATIVE STRENGTHS OF TRAFFIC AND PILOT CHANNELS DURING SOFT HANDOFF

Field of the Invention

This invention relates to digital communication systems and methods, and more specifically to reception of coded digital bit streams.

Background of the Invention

5 Digital bit streams are transmitted and received in many digital communications systems including but not limited to data storage systems and wireless and wired data communications systems. For wireless communications, there is currently an evolution from analog communications to digital
10 communications. Speech is represented by a series of bits that are modulated and transmitted from a base station to a radiotelephone. The radiotelephone demodulates the received waveform to recover the bits, which are then converted back into speech. There is also a growing demand for data services, such as e-mail and Internet access, which generally use digital communications.

15 There are many types of digital communications systems. Traditionally, Frequency-Division-Multiple-Access (FDMA) is used to divide the spectrum into a plurality of radio channels corresponding to different carrier frequencies. These carrier frequencies may be further divided into time slots, referred to as Time-Division-Multiple-Access (TDMA), as is the case in the D-AMPS, PDC, and GSM
20 digital cellular radiotelephone systems. Alternatively, multiple users can use the same radio channel using spread spectrum techniques such as Code-Division-Multiple-Access (CDMA).

Direct-Sequence (DS) spread-spectrum modulation is commonly used in CDMA systems, in which each information symbol is represented by a number of
25 "chips." Representing one symbol by many chips gives rise to "spreading", as the

latter typically uses more bandwidth to transmit. The sequence of chips is referred to as a spreading code or signature sequence. At the receiver, the received signal is despread using a despreading code, which is typically the conjugate of the spreading code. IS-95 and J-STD-008 are examples of DS CDMA standards.

5 With DS CDMA systems, coherent Rake reception is commonly used. The received signal is despread by correlating to the chip sequence, and the despread value is weighted by the conjugate of a channel coefficient estimate, removing the phase rotation of the channel and weighting the amplitude to indicate a soft or confidence value. When multipath propagation is present, the amplitude can vary dramatically.
10 Multipath propagation can also lead to time dispersion, which can cause multiple, resolvable echoes of the signal to be received. Correlators are aligned with the different echoes. Once the despread values have been weighted, they are summed. This weighting and summing operation is commonly referred to as Rake combining. Rake combining is described, for example, in U.S. Patent 5,237,586 to the present
15 inventor entitled "Rake Receiver with Selective Ray Combining" and U.S. Patent 5,305,349 to Dent entitled "Quantized Coherent Rake Receiver", the disclosures of both of which are hereby incorporated herein by reference in their entirety.

A conventional digital communications system **100** is shown in Figure 1. Digital symbols are provided to a transmitter **101**, which maps the symbols into a
20 representation appropriate for the transmission medium or channel such as a radio channel **103**, and couples the signal to the transmission medium via a transmit antenna **102**. The transmitted signal passes through the medium **103** and is received at a receive antenna **104**. The received signal is passed to receiver **105**. The receiver **105** includes a pre processor such as a radio processor **106**, a baseband signal processor
25 **110**, and a post processor **112**.

The radio processor **106** tunes to the desired band and desired carrier frequency, then amplifies, mixes, and filters the signal down to baseband. The signal is sampled and quantized, ultimately providing a sequence of baseband received samples. Since the original radio signal has in-phase (I) and quadrature (Q)
30 components, the baseband samples may also have I and Q components, giving rise to complex baseband samples.

The baseband processor **110** is used to detect the digital symbols that were transmitted. It may produce soft information as well, which gives information regarding the likelihood of the detected symbol values.

The post processor 112 performs functions that may depend highly on the particular communications application. For example, it may use the soft detected values to perform forward error correction decoding or error detection decoding. It also may convert digital symbols into speech using a speech decoder.

5 Coherent detection generally uses an estimation of how the symbols were modified by the transmitter 101, the channel 103, and/or the radio processor 106. As discussed previously, the transmission medium may introduce phase and amplitude changes in the signal, for example as a result of multipath propagation. The signal may also have become dispersed, giving rise to signal echoes. Each echo may have
10 an associated phase and amplitude, represented by a complex channel coefficient. Each echo also may have an associated delay. Coherent demodulation generally uses an estimation of these delays and coefficients. Typically, the channel is modeled as discrete rays, with channel coefficients assigned to the different delays.

In the IS-95 system, the forward link or down link (base station to
15 radiotelephone) includes a shared pilot channel. The transmitted signal on this pilot channel generally is known, and the power is typically much higher than the traffic or information bearing channel. Thus, the pilot channel generally provides a reference signal for use in channel estimation.

When using the pilot channel for channel estimation, the resulting channel
20 estimate is proportional to the square root of the power on the pilot channel. Ideally, the channel estimate should be proportional to the square root of the power on the traffic channel. When performing channel estimation on different signal echoes from the same base station, this proportional difference generally is not a problem, since all channel coefficients may differ by the same proportional amount.

25

Summary of the Invention

The present invention includes digital receivers and receiving methods that scale for relative strengths of traffic and pilot channels during soft handoff. In particular, spread spectrum signals are processed from a plurality of traffic channels
30 and a plurality of pilot channels by receiving data samples from a plurality of traffic channels and a plurality of pilot channels. Detection statistics are obtained from the received data samples that correspond to information symbols while accounting for the relative strengths of the plurality of traffic channels and the plurality of pilot channels. The detection statistics are preferably obtained by performing Rake

combining while accounting for the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

The invention stems from the realization that a mobile radiotelephone is often in soft or softer handoff, in which it receives transmissions from more than one transmitter. The different pilot and traffic channel powers generally are not the same for all base station transmissions. As a result, use of the pilot channel for channel estimation can become a problem. When channel estimates based on the different pilot channels are used to combine signal echoes together, these echoes may be combined with the wrong weighting.

For example, consider a radiotelephone that receives pilot and traffic channels from two base stations, A and B. Suppose the received power of the two pilot channels is the same, whereas the received traffic channel power from base station A is 10 times stronger than from base station B. Using the pilot channels for channel estimation, the two traffic signals would be combined such that, on average, the signals would be weighted equally. However, for optimum performance, the two signals should be weighted unequally, giving more weight to the stronger traffic signal from base station A.

The present invention can solve this problem by employing scale factors for each base station signal. These scale factors are included in the Rake receiver and can account for differences in the relative strengths between pilot and traffic channels.

More specifically, spread spectrum signals from a plurality of traffic channels and a plurality of pilot channels are processed by receiving data samples from the plurality of traffic channels and the plurality of pilot channels. The received data samples are correlated to spreading codes to produce pilot despread values and traffic despread values. Scale factors corresponding to the relative strengths of the plurality of traffic channels and the plurality of pilot channels are formed. A channel response is estimated using the pilot despread values to produce channel coefficient estimates. The traffic despread values are combined to obtain detection statistics that correspond to information symbols using the channel coefficient estimates. According to the invention, the traffic despread values, the channel estimates and/or the pilot despread values are scaled by the scale factors so as to obtain detection statistics that correspond to the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

In a first embodiment, the traffic despread values are scaled by the scale factors so as to obtain scaled traffic despread values that are a function of the relative strengths of the plurality of traffic channels and the plurality of pilot channels. In a second embodiment, the channel coefficient estimates are scaled by the scale factors so as to obtain scaled channel coefficient estimates that are a function of the relative strengths of the plurality of traffic channels and the plurality of pilot channels. In a third embodiment, the pilot despread values are scaled by the scale factors so as to obtain scaled pilot despread values that are a function of the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

10 The scale factors may be formed by estimating power on a pilot channel, estimating power on a traffic channel and determining scale factors based on the estimated powers on the pilot channel and the traffic channel. Alternatively, an error signal may be formed using the pilot channel despread values and the traffic channel despread values, and a scale factor may be computed based on the error signal.

15 Moreover, scale factors may be formed using pilot despread values and traffic despread values corresponding to a plurality of delays of the transmitted signal. Finally, when estimating power on a traffic channel, an equivalent full rate power on the channel may be estimated that is independent of the reduced power that may be used with reduced data rates.

20 The present invention is preferably used during soft handoff from a first traffic channel to a second traffic channel. The first and second traffic channels may be provided by first and second base stations. Alternatively, the first and second traffic channels may be provided by two beam patterns or sectors from a single base station. Accurate channel estimation during handoff may therefore be provided, to thereby
25 allow more accurate detection statistics.

Brief Description of the Drawings

Figure 1 is a block diagram of a conventional digital communications system;

Figure 2 is a block diagram of a baseband processor;

30 Figure 3 is a block diagram of a Rake combiner;

Figure 4 is a block diagram of a baseband processor according to the present invention;

Figure 5 is a block diagram of a scaled combiner according to the present invention;

Figure 6 is a block diagram of a scale factors estimator employing single scale factor estimators according to the present invention;

Figure 7 is a block diagram of a feedforward single scale factor estimator according to the present invention;

5 Figure 8 is a block diagram of a feedback single scale factor estimator according to the present invention;

Figure 9 is a block diagram of a scale factors estimator employing both single and double scale factor estimators according to the present invention;

10 Figure 10 is a block diagram of a feedback double scale factor estimator according to the present invention; and

Figure 11 is a block diagram of a second embodiment of a baseband processor according to the present invention.

Detailed Description of Preferred Embodiments

15 The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and
20 complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

For wireless communications, a transmitter emits electromagnetic waveforms from an antenna, the medium is the radio propagation environment, and a receiver employs one or more antennas to recover the transmitted signal. While the following
25 embodiments are described in the context of radio communications, the invention is not limited to such systems and methods. It is also applicable to other digital communications environments including wire communications and magnetic storage systems. In such applications a radio processor may be generalized to a device that extracts data from the transmission or storage medium.

30 In co-pending application Serial No. 08/748,755 to Bottomley et al., entitled "Despreading of Direct Sequence Spread Spectrum Communications Signals", the disclosure of which is hereby incorporated herein by reference in its entirety, an approach for Rake combining is described which includes channel estimation using a

pilot channel. A baseband processor **110'**, according to this pending application is illustrated in Figure 2. Baseband data samples are provided to a bank of two-channel despreader units **202a-202c**, which correlate different delays of the received signal to the despreading codes of the pilot and traffic channels, producing pilot and traffic
 5 despread values. In Figure 2, the different despreaders capture signal images from the same base station. The pilot despread values are provided to channel coefficient estimators **204a-204c**, which can use conventional techniques to estimate complex channel coefficients. The traffic despread values and the channel coefficient estimates are provided to a Rake combiner **206**, which combines the different traffic
 10 despread values using the channel estimates to produce detection statistics.

The combining operation is a weighted sum, in which the weights are the conjugates of channel coefficient estimates. This is illustrated in Figure 3. Channel estimates and traffic despread values are provided to multipliers **302a-302c**, which produce products of traffic despread values with conjugates of channel estimates, i.e.
 15 channel coefficient estimates. If BPSK symbols are used, only the real part of this product is produced. Adder **304** sums the products together to produce the detection statistics.

Consider an example, in which the received chip-spaced baseband samples during one symbol period are represented by $r(k)$. The samples are modeled as
 20
$$r(k) = c_0[bKs_T(k) + s_P(k)] + c_1[bKs_T(k-1) + s_P(k-1)] + c_2[bKs_T(k-2) + s_P(k-2)] + w(k) \quad (1)$$
 where b is the symbol sent, c_j are the channel coefficients, the delays are 0, 1, and 2 chip periods, $s_T(k)$ is the traffic channel chip sequence used to spread the symbol, $s_P(k)$ is the pilot channel chip sequence, K is the relative amplitude between the traffic and pilot channels, and $w(k)$ is the impairment (noise + interference). Note that the delays
 25 correspond to delayed images of the transmitted signal.

The two-channel despreader **202a-202c** produce despread values for the pilot and traffic channels, denoted $x_P(j)$ and $x_T(j)$, where j indicates which despreader unit. The traffic despread values can be expressed as

$$x_T(j) = \frac{1}{L} \sum_{k=0}^{L-1} S_T^*(k) r(k+j) \quad (2)$$

30 where the superscript "*" denotes complex conjugation and L is the despreading factor. Division of L is shown for illustrative purposes. In practice it is known how to extend results to the case when the division is omitted.

The Rake combiner 206 of Figure 3 combines the despread values using estimates of the channel coefficients, denoted c_j , to produce a detection statistic that corresponds to an information symbol. This can be expressed as

$$z = \hat{c}_0^* x_T(0) + \hat{c}_1^* x_T(1) + \hat{c}_2^* x_T(2) \quad (3)$$

- 5 The symbol value that is closest to z gives the detected value \hat{b} . For BPSK modulation, b is either +1 or -1, so that the detected value is given by the sign of the real part of z . The detection statistic can be used as a soft value, for further processing.

- Now consider the case in which each despreader uses a despreading code
10 corresponding to a different base station. This would be the case in a three-way soft handoff with base stations d, e, and f. For this case, the received samples during a particular symbol period can be modeled as

$$r(k) = c_d [b K_d s_T^d(k) + s_p^d(k)] + c_e [b K_e s_T^e(k) + s_p^e(k)] + c_f [b K_f s_T^f(k) + s_p^f(k)] + w(k) \quad (4)$$

- where b is the symbol sent, c_x are the channel coefficients corresponding to the
15 different base stations, $S_T^x(k)$ is the traffic channel chip sequence used to spread the symbol on base station $S_p^x(k)$ is the pilot channel chip sequence corresponding to base station x , K_x is the relative amplitude between the pilot and traffic channels for base station x , and $w(k)$ is the impairment (noise + interference).

- Despreading is used to form despread values for the traffic channels for each
20 base station signal, denoted x_T^x , where x indicates the base station signal. For optimal performance, the detection statistic z should be

$$z = K_d \hat{c}_d^* x_T^d + K_e \hat{c}_e^* x_T^e + K_f \hat{c}_f^* x_T^f \quad (5)$$

- As shown in Equation (5), scale factors K_x are needed for optimal combining.
However, if the approach described in Figures 2 and 3 is used, then the scale factors
25 are not present, which can lead to suboptimal performance.

- In the present invention, estimates of these scale factors are included. One approach is to estimate the scale factors and apply them to the traffic despread values prior to weighting by the channel estimates. Another approach scales the channel estimates first. A third approach applies the scale factors to the pilot despread values,
30 so that they are implicitly included in the channel estimates. These approaches will be described in detail below.

Baseband processor 110", according to the present invention are shown in Figure 4. Compared to Figure 2, the pilot despread values are also provided to the combiner 406 and the combining is performed by a scaled combiner 406. It will be understood that, in general, the two-channel despreader 202a-202c can be replaced
5 with any device that forms despread values for the pilot and traffic channels, such as two correlators.

An embodiment of the scaled combiner 406' is illustrated in Figure 5. Compared to Figure 3, the traffic despread values are scaled prior to combining. Scalers 502a-502c scale the complex traffic despread values by a real number
10 multiplication. Scale factors are estimated in scale factors estimator 504, which uses pilot and traffic despread values to form scale factors. Multipliers 203a-302c are used to multiply the scaled traffic despread values and the channel estimates. An alternative can apply the scale factors to the channel estimates instead of the traffic despread values, prior to combining.

15 For BPSK modulation, multipliers 302a-302c only form the real part of the product. For this case, it is preferable to scale after the multiplier rather than before, so that only one real multiply may need to be performed during scaling.

An embodiment of the scale factors estimator 504' is illustrated in Figure 6 for the case where each pair of pilot and traffic despread values corresponds to a different
20 base station signal. The pilot and traffic despread values corresponding to the same base station are provided single scale factor estimators 602a-602c, which produce the scale factors.

An embodiment of a single scale factor estimator 602a' corresponding to a feedforward design is illustrated in Figure 7. The pilot power is estimated in power
25 estimator 706a using the pilot despread values. Specifically, the real and imaginary parts of the complex pilot despread values are squared and added together in magnitude square unit 702a. The resulting power estimate is smoothed in smoother 704a using, for example, exponential smoothing, to produce a smoothed pilot power estimate. Similar operations are applied to the traffic despread values by magnitude
30 squared unit 702b and smoother 704b to produce a smoothed traffic power estimate. In divider 708, the smoothed traffic power estimate is divided by the smoothed pilot power estimate to produce a power ratio. The square root of this power ratio is determined by square root unit 710, producing a scale factor.

An alternative embodiment of a single scale factor estimator **602a** corresponding to a feedback design is illustrated in Figure 8. The pilot despread value is scaled by the scale factor in multiplier **810**. The scaled pilot despread value is magnitude squared in magnitude square unit **702a**, producing a pilot magnitude square value. The traffic despread value is magnitude squared in magnitude square unit **702b**, producing a traffic magnitude square value. The difference between the traffic magnitude square value and the pilot magnitude square value is determined by adder **815**. This difference provides an error signal to a conventional Automatic Gain Control (AGC) unit **820**, which adaptively determines a gain such that the size of the difference is minimized over time. This AGC gain is the scale factor, which can be initialized to one.

Thus, in Figure 8, the scale factor is determined by a feedback control loop, which drives the scaled pilot despread values to have the same power as the traffic channel. The AGC circuit can, for example, filter the error signal and scale it by an AGC loop gain. The resulting signal is then accumulated and used as the gain or used to compute a gain.

Another embodiment of a scale factors estimator **504** is illustrated in Figure 9 for the case where one pair of pilot and traffic despread values corresponds to one base station signal and the other two pairs of pilot and traffic despread values correspond to a second base station. The despread values corresponding to the second base station are provided to double scale factor estimator **910**, which produces a common scale factor.

An embodiment of a double scale factor estimator **910** is illustrated in Figure 10 and corresponds to a feedback design. The embodiment of Figure 10 is similar to Figure 8, except that the error signal provided to AGC unit **820** is a weighted combination of error signals provided by processing of the different pairs of pilot and traffic despread values. The differences produced by adders **815a** and **815b** are multiplied in multipliers **1001a-1001b** by weights, w_a and w_b , respectively. These weights can be dependent on the strengths of the rays, giving more weight to a stronger ray. Ray strength can be determined by channel estimates. Also, the multipliers **1001a-1001b** may be omitted, giving equal weight to both differences.

It also will be understood to one of skill in the art that a double scale factor estimator corresponding to the feedforward design can be implemented. Pilot power

estimates from multiple delays can be combined prior to the divider, as well as multiple traffic power estimates. There can be one divider per delay, followed by an averaging device prior to the square root. Other configurations may be provided.

5 A second embodiment of a baseband processor 110''' according to the present invention is illustrated in Figure 11. In this embodiment, feedback AGC is used to scale the pilot despread values prior to channel estimation. As a result, a conventional Rake combiner 206 can be used.

10 The present invention can also exploit side information regarding the relative strengths of the pilot and traffic channels from a particular base station. For example, the receiver may be given information from the base station regarding the relative strengths. Conventional control techniques also may allow computation of the relative strengths. Also, once the relative strengths are known, changes in the relative strengths may be a function of known power control commands. It will also be understood that the power on a traffic channel may be estimated using an equivalent
15 full rate power on the traffic channel. Specifically, it is known to vary the power level of a signal as a function of the data rate to maintain the energy per bit relatively constant. Accordingly, data rate information may be included when estimating the power on a traffic channel.

For example, the traffic correlations can be scaled to corresponding full-rate
20 levels using detected rate information. For Rate set 1 in IS-95, there are four data rates: 9600 bps, 4800 bps, 2400 bps, and 1200 bps. These are transmitted at relative power levels of 1, 1/2, 1/4, 1/8, respectively. Thus, traffic correlations can be scaled using scale factors 1, $\sqrt{2}$, 2 and $\sqrt{8}$ depending on the detected rate. Certain frames can be skipped if the rate cannot be determined, the CRC or some error detection
25 scheme indicates errors, and/or the rate is not known with enough confidence. Alternatively, correlations can be scaled to correspond to any of the four rates or some arbitrary level. For example, scale factors $\sqrt{1/8}$, 1/2, $1/\sqrt{2}$ and 1 can be used for rates 9600, 4800, 2400 and 1200 bps to normalize with respect to the lowest rate.

It may also be desirable to normalize the scale factors by the largest or some
30 nominal base station. Then, for correlations from one base station, no scaling may be necessary.

The despreading operation is based on delay estimates for the different signal echoes or images. Any conventional delay estimation approach may be used. It can

employ the approaches disclosed in pending U.S. Application Serial No. 09/005,580 to Sourour et al., entitled "*Method and Apparatus for Multipath Delay Estimation in Direct Sequence Spread Spectrum Communication Systems*", filed January 12, 1998, the disclosure of which is hereby incorporated herein by reference.

5 The present invention can use any type of channel coefficient estimation/tracking algorithm. For example, the LMS, KLMS, RLS, and Kalman tracking algorithms may be used. While chip-spaced rays were used as examples, the rays can have arbitrary spacing, including fractional spacing. Channel coefficient estimation can also be performed using interpolation between pilot symbol sections.

10 Pulse shaping side information also may be used to improve coefficient estimation. Similarly, the present invention can use many approaches to scale factor estimation. The scale factors can be either tracked or interpolated between pilot symbol sections.

 The present invention also can be used in a multi-pass approach. Despread values corresponding to a data frame can be stored. In the post-processing phase,

15 forward-error-correction and forward-error-detection decoding can be used to correct or detect errors. Then, re-encoding can be used to provide reference symbols for a second-pass, for better parameter estimation. Multi-pass demodulation is described in U.S. Patent 5,673,291 to Dent entitled "*Simultaneous Demodulation and Decoding of a Digitally Modulated Radio Signal Using Known Symbols*", the disclosure of which

20 is hereby incorporated herein by reference. The present invention can also be used in conjunction with enhanced Rake combining approaches.

 The present invention can be used with multiple receive antennas. Scale factors then may only be a function of base station, being the same for different antennas. Thus, when estimating the scale factors, data from different antennas can

25 be used in an analogous way to using data from different rays or delays. The present invention can also be used in conjunction with the multiple receive antenna combining techniques described in U.S. Application Serial No. 08/992,174 to Karlsson et al., entitled "*Mobile Station Having Plural Antenna Elements and Interference Suppression*", filed December 17, 1997, the disclosure of which is hereby

30 incorporated herein by reference.

 The invention has been described in the context of a pilot channel as the reference. It will be understood that pilot channels include systems with pilot symbols, wherein the pilot symbol power may differ from the traffic channel power.

Those skilled in the art will appreciate that the present invention is not limited to the specific embodiments which have been described herein for the purposes of illustration. The scope of the invention, therefore, is defined by the claims which are appended hereto, rather than the foregoing description, and all equivalents which are
5 consistent with the meaning of the claims are intended to be embraced herein.

What is Claimed is:

1. A method of processing spread spectrum signals from a plurality of traffic channels and a plurality of pilot channels, comprising the steps of:
 - receiving data samples from the plurality of traffic channels and the plurality
 - 5 of pilot channels;
 - correlating the received data samples to spreading codes to produce pilot despread values and traffic despread values;
 - forming scale factors corresponding to the relative strengths of the plurality of traffic channels and the plurality of pilot channels;
 - 10 estimating channel responses using the pilot despread values to produce channel coefficient estimates;
 - combining the traffic despread values to obtain detection statistics that correspond to information symbols, using the channel coefficient estimates; and
 - scaling at least one of the traffic despread values, the channel estimates and
 - 15 the pilot despread values by the scale factors so as to obtain detection statistics that correspond to the relative strengths of the plurality of traffic channels and the plurality of pilot channels.
2. A method according to Claim 1 wherein the scaling step comprises the step of scaling the traffic despread values by the scale factors so as to obtain scaled traffic despread values that are a function of the relative strengths of the plurality of traffic channels and the plurality of pilot channels.
3. A method according to Claim 1 wherein the scaling step comprises the step of scaling the channel coefficient estimates by the scale factors so as to obtain scaled channel coefficient estimates that are a function of the relative strengths of the plurality of traffic channels and the plurality of pilot channels.
4. A method according to Claim 1 wherein the scaling step comprises the step of scaling the pilot despread values by the scale factors so as to obtain scaled pilot despread values that are a function of the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

5. A method according to Claim 1 wherein the step of forming scale factors comprises the steps of:
- estimating power on a pilot channel;
 - estimating power on a traffic channel; and
 - 5 determining scale factors based upon the estimated powers on the pilot channel and the traffic channel.
6. A method according to Claim 1 wherein the step of forming scale factors comprises the steps of:
- forming an error signal using the pilot channel despread values and the traffic channel despread values; and
 - 5 computing a scale factor based on the error signal.
7. A method according to Claim 1 wherein the step of forming scale factors comprises the step of forming scale factors corresponding to the relative strengths of the plurality of traffic channels and the plurality of pilot channels using pilot despread values and traffic despread values corresponding to a plurality of
- 5 delays of a transmitted signal.
8. A method according to Claim 1 wherein the step of receiving comprises the step of receiving data samples from the plurality of traffic channels and the plurality of pilot channels during soft handoff from a first one of the traffic channels to a second one of the traffic channels.
9. A method according to Claim 5 wherein the step of estimating power on a traffic channel comprises the step of estimating an equivalent full rate power on the traffic channel.
10. A method of processing spread spectrum signals from a plurality of traffic channels and a plurality of pilot channels, comprising the steps of:
- receiving data samples from the plurality of traffic channels and the plurality of pilot channels; and

- 5 obtaining from the received data samples detection statistics that correspond to information symbols while accounting for the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

11. A method according to Claim 10 wherein the step of obtaining comprises the step of performing Rake combining while accounting for the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

12. A system for processing spread spectrum signals from a plurality of traffic channels and a plurality of pilot channels, the system comprising:

- means for receiving data samples from the plurality of traffic channels and the plurality of pilot channels;
- 5 means for correlating the received data samples to spreading codes to produce pilot despread values and traffic despread values;
- means for forming scale factors corresponding to the relative strengths of the plurality of traffic channels and the plurality of pilot channels;
- means for estimating channel responses using the pilot despread values to
- 10 produce channel coefficient estimates;
- means for combining the traffic despread values to obtain detection statistics that correspond to information symbols, using the channel coefficient estimates; and
- means for scaling at least one of the traffic despread values, the channel estimates and the pilot despread values by the scale factors such that the means for
- 15 combining obtains detection statistics that correspond to the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

13. A system according to Claim 12 wherein the scaling means comprises means for scaling the traffic despread values by the scale factors such that the means for combining obtains scaled traffic despread values that are a function of the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

14. A system according to Claim 12 wherein the scaling means comprises means for scaling the channel coefficient estimates by the scale factors such that the means for combining obtains scaled channel coefficient estimates that are a function

of the relative strengths of the plurality of traffic channels and the plurality of pilot
5 channels.

15. A system according to Claim 12 wherein the scaling means comprises means for scaling the pilot despread values by the scale factors such that the means for combining obtains scaled pilot despread values that are a function of the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

16. A system according to Claim 12 wherein the means for forming scale factors comprises:

- means for estimating power on a pilot channel;
- means for estimating power on a traffic channel; and
- 5 means for determining scale factors based upon the estimated powers on the pilot channel and the traffic channel.

17. A system according to Claim 12 wherein the means for forming scale factors comprises:

- means for forming an error signal using the pilot channel despread values and the traffic channel despread values; and
- 5 means for computing a scale factor based on the error signal.

18. A system according to Claim 12 wherein the means for forming scale factors comprises means for forming scale factors corresponding to the relative strengths of the plurality of traffic channels and the plurality of pilot channels using pilot despread values and traffic despread values corresponding to a plurality of
5 delays of a transmitted signal.

19. A system according to Claim 12 wherein the means for receiving comprises soft handoff receiving means.

20. A system according to Claim 16 wherein the means for estimating power on a traffic channel comprises means for estimating an equivalent full rate power on the traffic channel.

21. A system for processing spread spectrum signals from a plurality of traffic channels and a plurality of pilot channels, the system comprising:

means for receiving data samples from the plurality of traffic channels and the plurality of pilot channels; and

5 means for obtaining from the received data samples detection statistics that correspond to information symbols while accounting for the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

22. A system according to Claim 21 wherein the means for obtaining comprises means for performing Rake combining while accounting for the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

23. A system for processing spread spectrum signals from a plurality of traffic channels and a plurality of pilot channels, the system comprising:

a receiver that receives data samples from the plurality of traffic channels and the plurality of pilot channels;

5 a correlator that correlates the received data samples to spreading codes to produce pilot despread values and traffic despread values;

a scale factor estimator that estimates scale factors corresponding to the relative strengths of the plurality of traffic channels and the plurality of pilot channels;

10 a channel coefficient estimator that estimates channel responses using the pilot despread values to produce channel coefficient estimates;

a combiner that combines the traffic despread values to obtain detection statistics that correspond to information symbols, using the channel coefficient estimates; and

15 a scaler that scales at least one of the traffic despread values, the channel estimates and the pilot despread values by the scale factors such that the combiner obtains detection statistics that correspond to the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

24. A system according to Claim 23 wherein the scaler scales the traffic despread values by the scale factors such that the combiner obtains scaled traffic despread values that are a function of the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

25. A system according to Claim 23 wherein the scaler scales the channel coefficient estimates by the scale factors such that the combiner obtains scaled channel coefficient estimates that are a function of the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

26. A system according to Claim 23 wherein the scaler scales the pilot despread values by the scale factors such that the combiner obtains scaled pilot despread values that are a function of the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

27. A system according to Claim 23 wherein the scale factor estimator comprises:

- a pilot channel power estimator; and
- a traffic channel power estimator.

28. A system according to Claim 23 wherein the scale factor estimator comprises:

- an error signal generator that is responsive to the pilot channel despread values and the traffic channel despread values.

29. A system according to Claim 23 wherein the scale factor estimator forms scale factors corresponding to the relative strengths of the plurality of traffic channels and the plurality of pilot channels using pilot despread values and traffic despread values corresponding to a plurality of delays of a transmitted signal.

30. A system according to Claim 23 wherein the receiver comprises a soft handoff receiver.



31. A system according to Claim 27 wherein the traffic channel power estimator comprises an equivalent full rate power traffic channel estimator.

32. A system for processing spread spectrum signals from a plurality of traffic channels and a plurality of pilot channels, the system comprising:

a receiver that receives data samples from the plurality of traffic channels and the plurality of pilot channels; and

- 5 a processor that obtains from the received data samples detection statistics that correspond to information symbols while accounting for the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

33. A system according to Claim 32 wherein the processor performs Rake combining while accounting for the relative strengths of the plurality of traffic channels and the plurality of pilot channels.

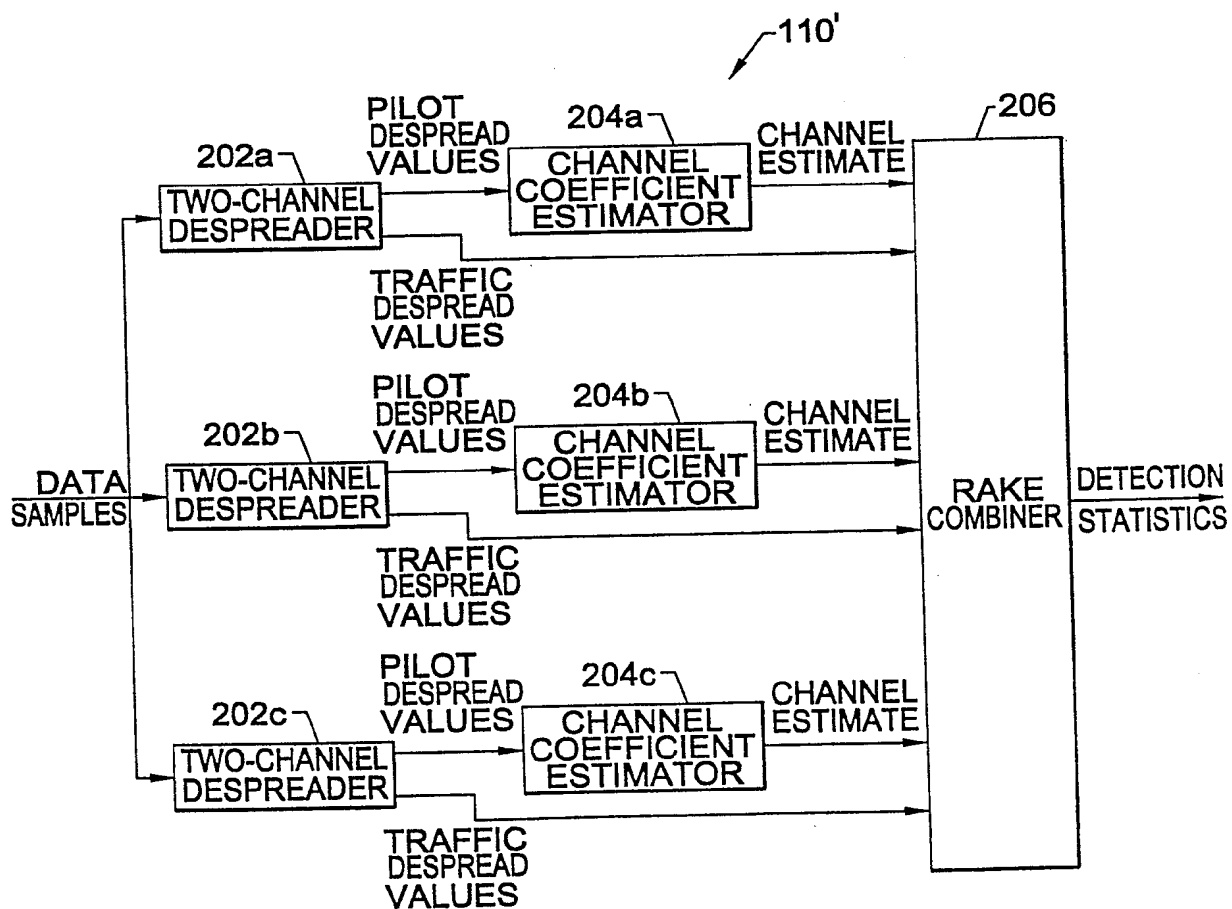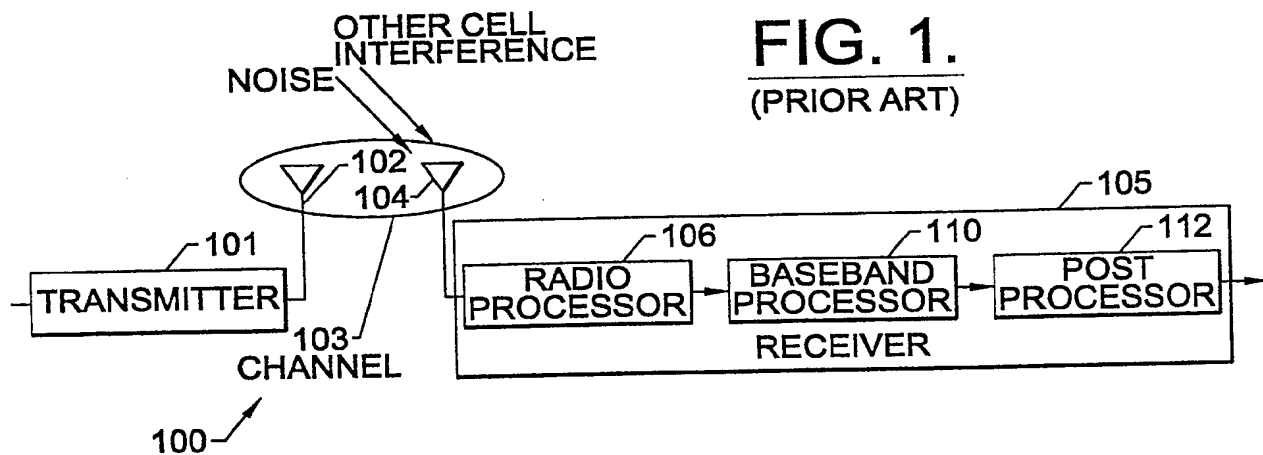

2 / 6

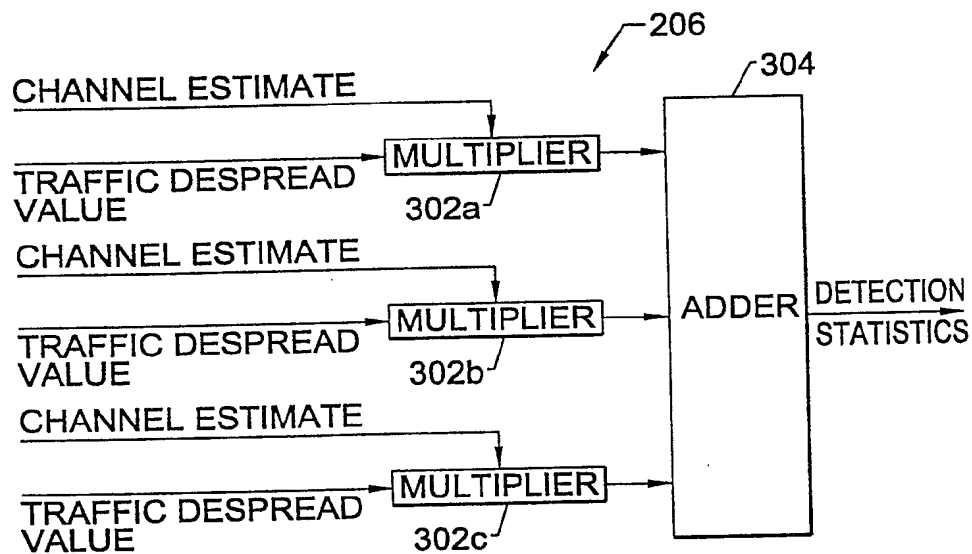


FIG. 3.

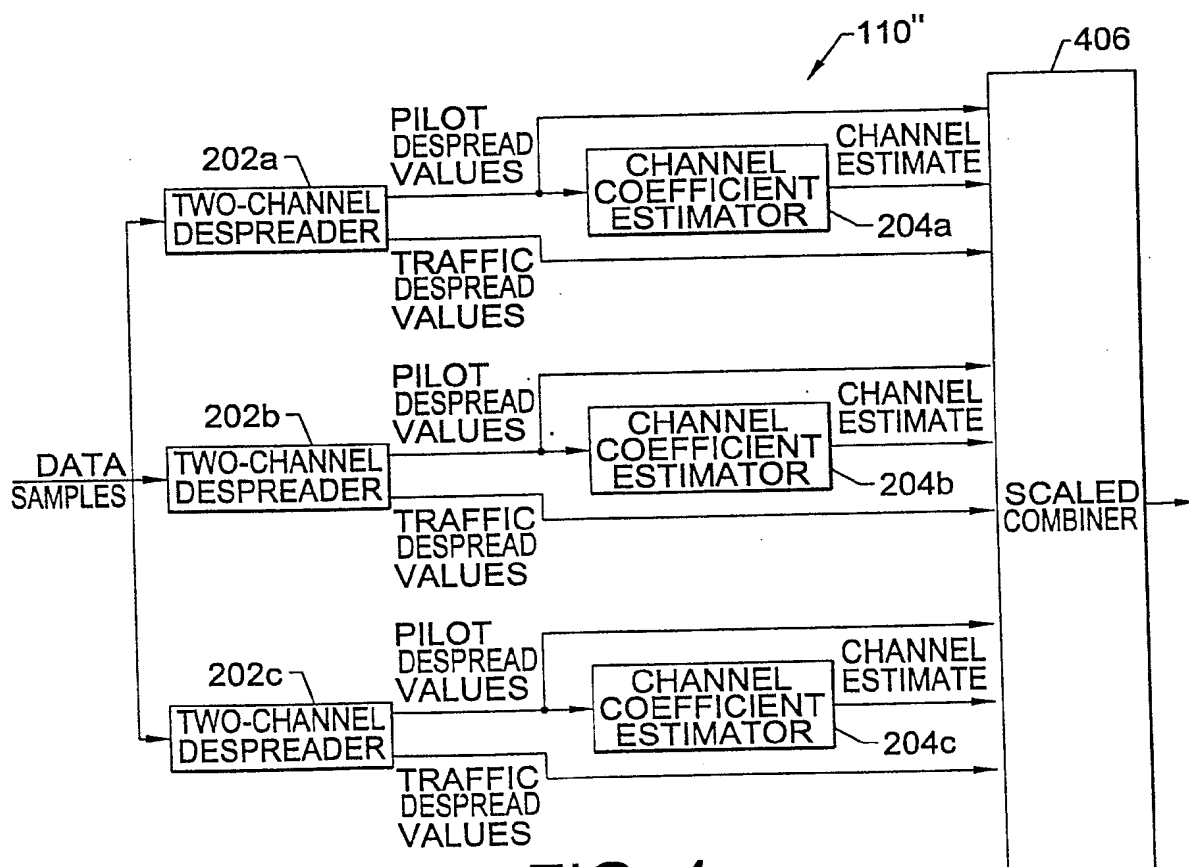


FIG. 4.

3 / 6

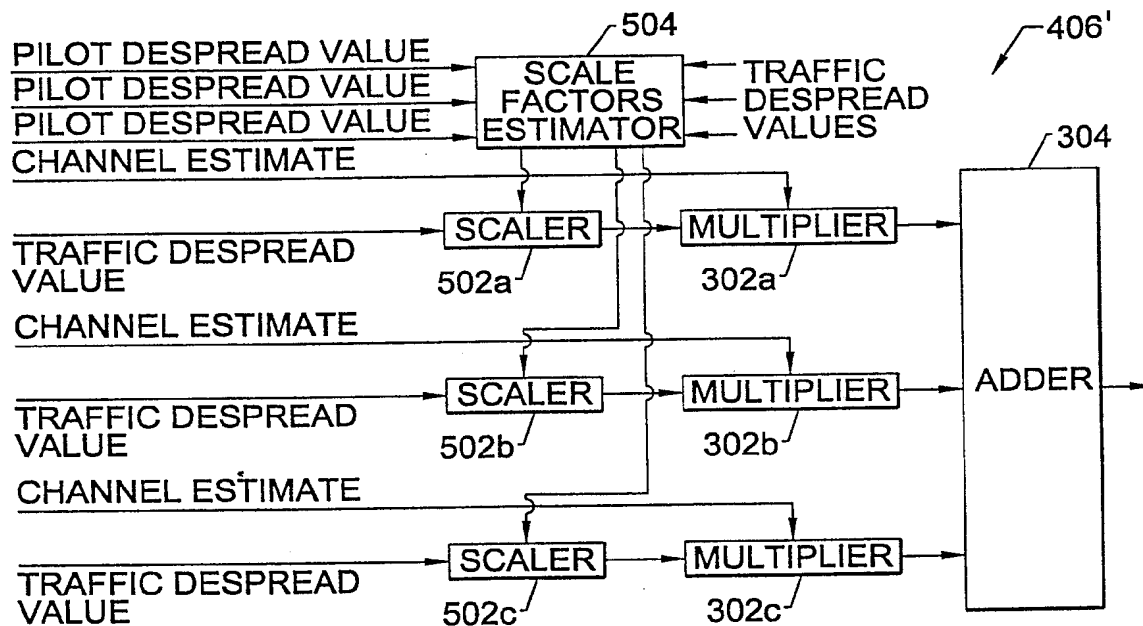


FIG. 5.

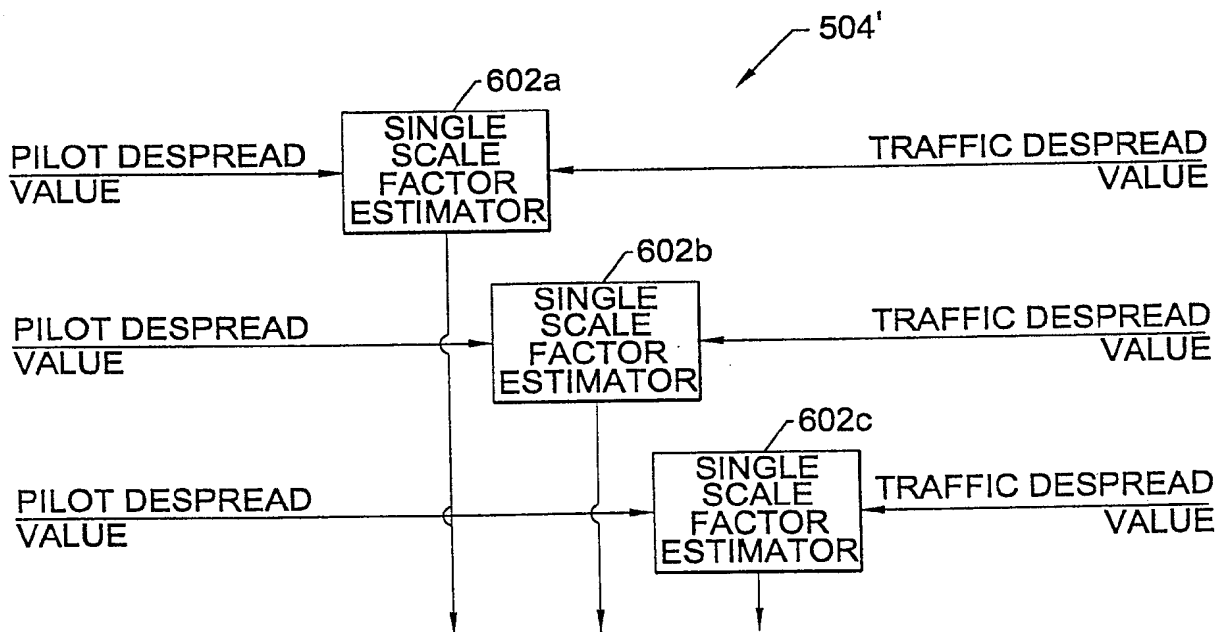
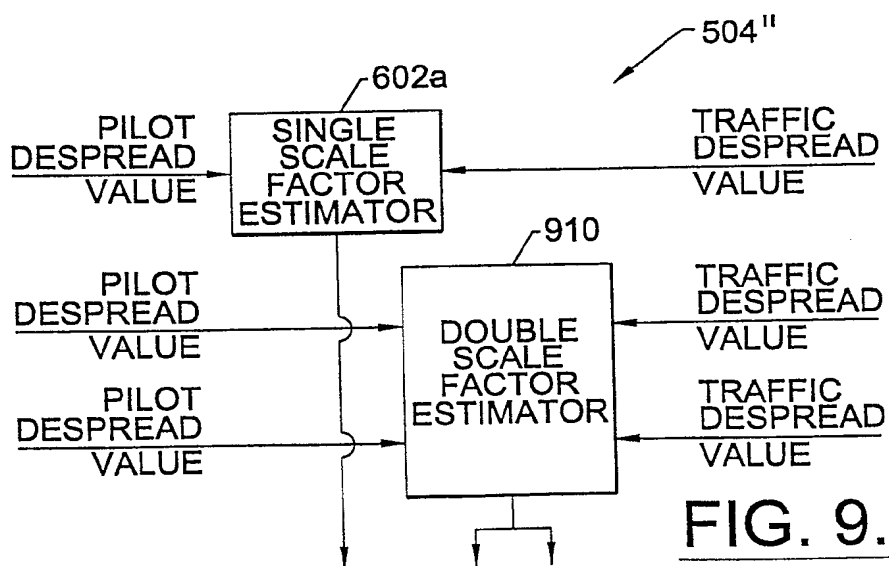
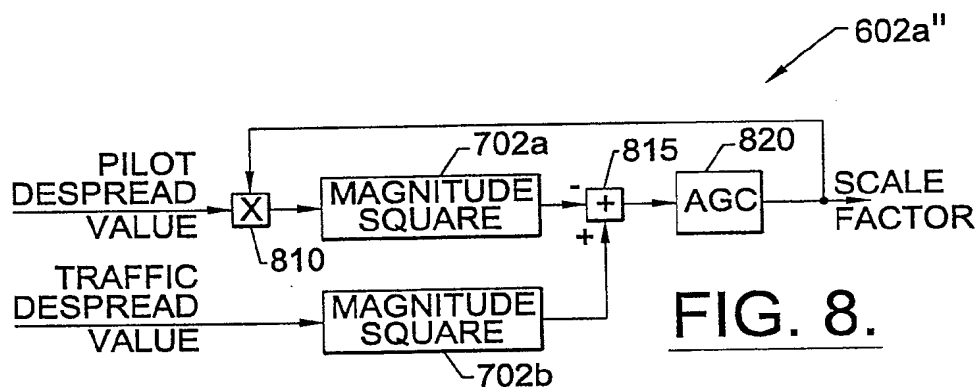
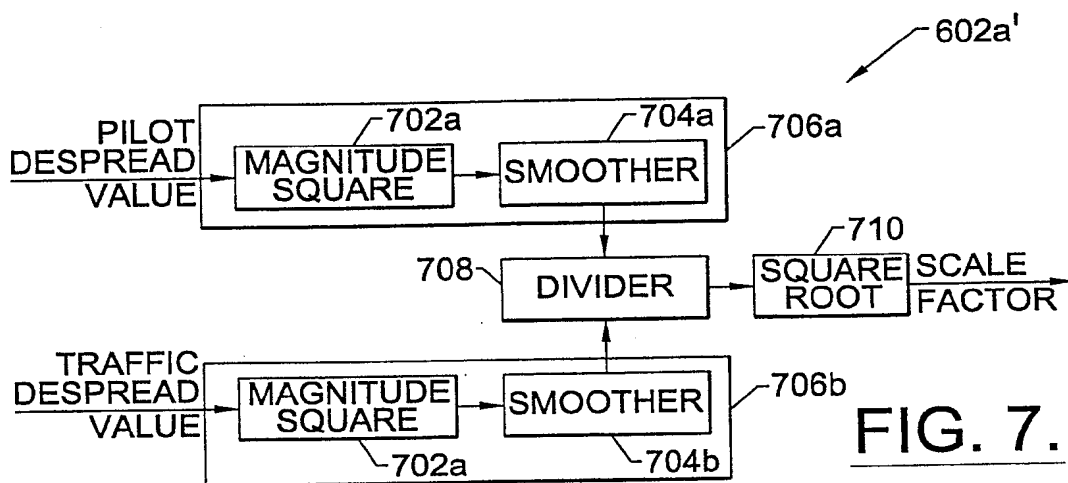
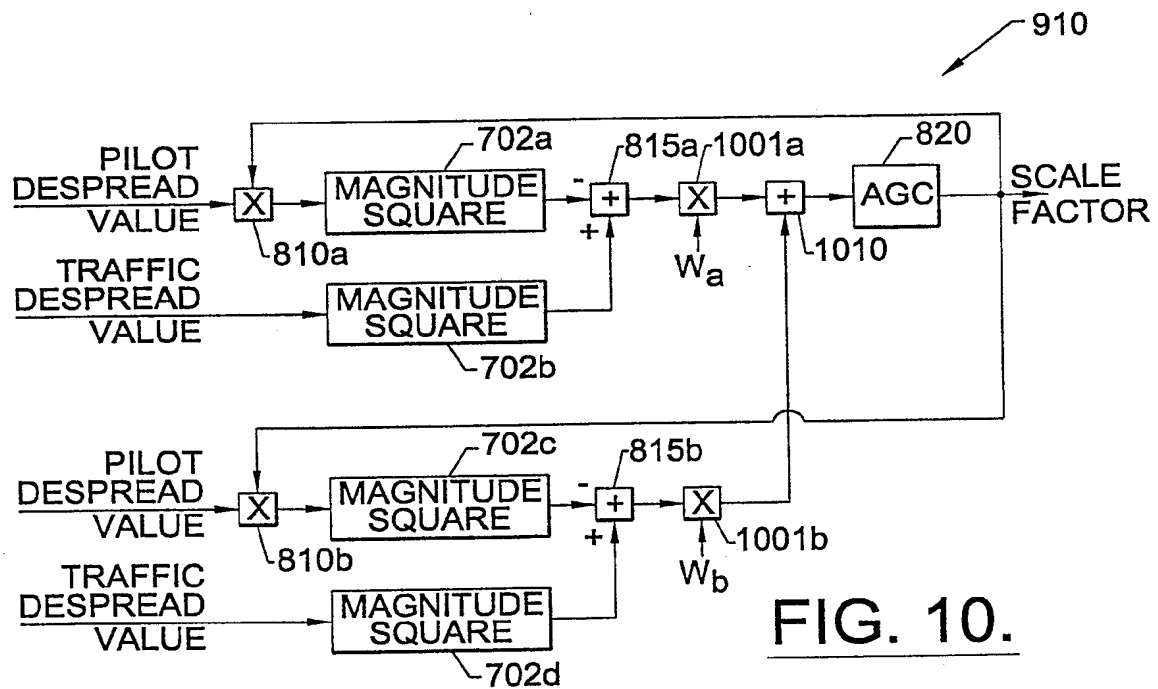


FIG. 6.





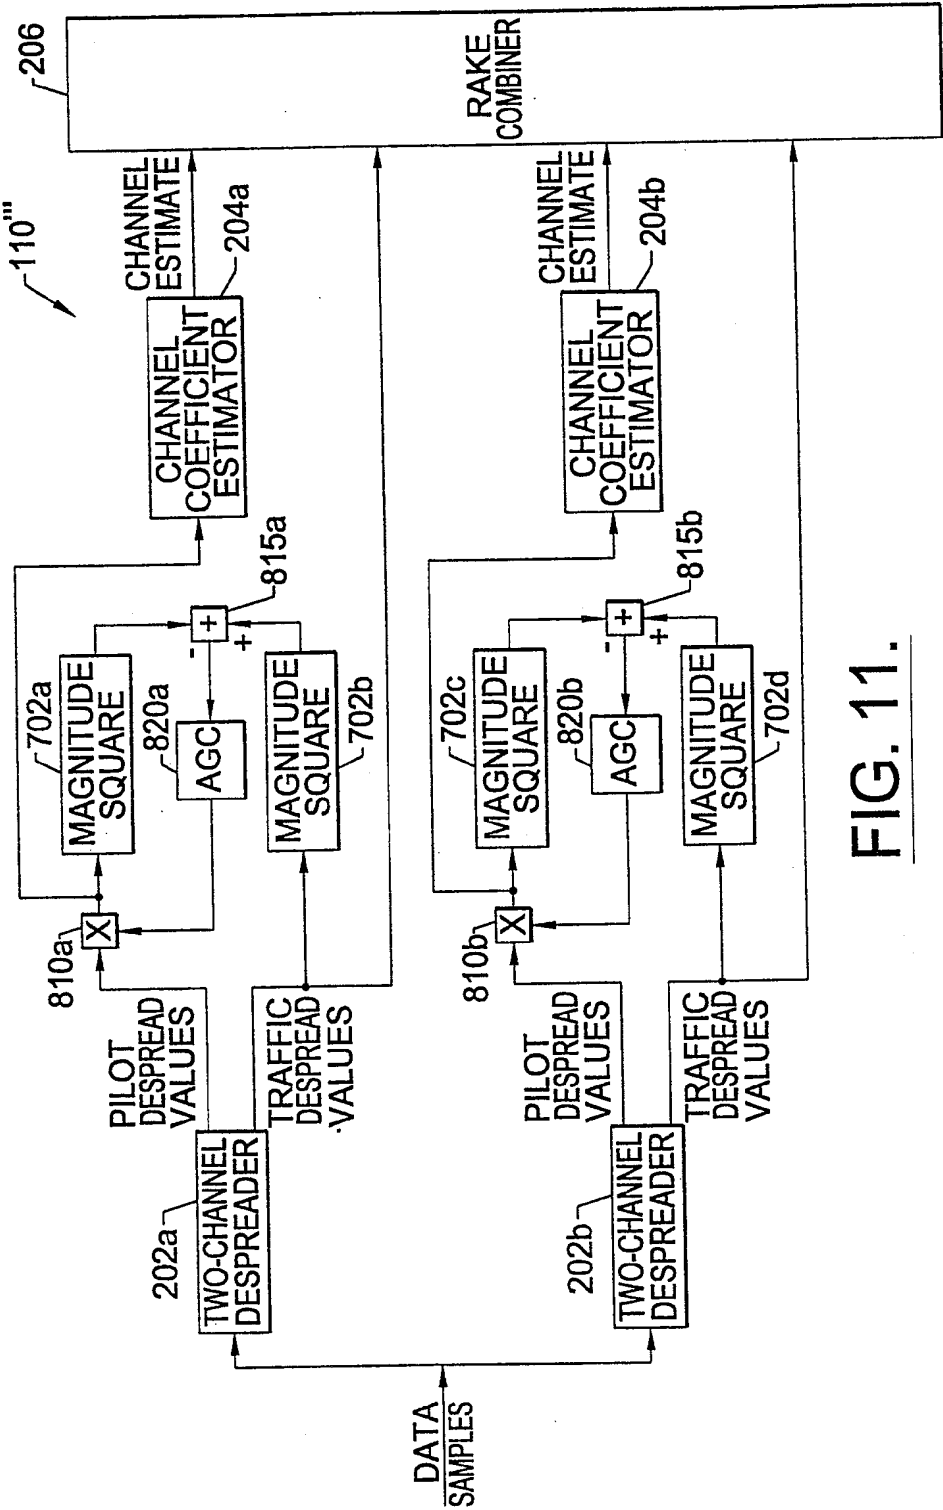


FIG. 11.

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 99/23969

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04B1/707 H04B7/02 H04B7/26 H04B7/005

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 42155 A (NOKIA TELECOMMUNICATIONS OY ;STAABLE LAURI (FI)) 24 September 1998 (1998-09-24) page 2, line 22 -page 4, line 19 page 5, line 18 -page 6, line 14; figures 2,3	1-5, 7-16, 18-27, 29-33
A	US 5 109 390 A (GILHOUSEN KLEIN S ET AL) 28 April 1992 (1992-04-28) column 7, line 49 -column 8, line 50 column 13, line 21 - line 34; figure 2 column 15, line 24 - line 54 column 16, line 44 - line 58; figure 4 -/-	1,5,8, 10-12, 16,19, 21-23, 27,30, 32,33



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

10 February 2000

Date of mailing of the international search report

18/02/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Nilsson, M

INTERNATIONAL SEARCH REPORT

Inter. Patent Application No.

PCT/US 99/23969

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 101 501 A (GILHOUSEN KLEIN S ET AL) 31 March 1992 (1992-03-31)</p> <p>column 3, line 45 - line 65 column 4, line 16 - line 26 column 5, line 22 -column 6, line 5 column 10, line 2 - line 38; figure 2 column 13, line 43 -column 14, line 14; figure 4</p> <hr/>	<p>1,5,8, 10-12, 16,19, 21-23, 27,30, 32,33</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/23969

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9842155 A	24-09-1998	US 5983105 A	09-11-1999
		AU 6625098 A	12-10-1998
		EP 0968574 A	05-01-2000
		NO 994493 A	16-09-1999
US 5109390 A	28-04-1992	AT 163244 T	15-02-1998
		AU 649987 B	09-06-1994
		AU 6874891 A	31-05-1991
		CA 2072876 A	08-05-1991
		CN 1061311 A, B	20-05-1992
		DE 69032044 D	19-03-1998
		DE 69032044 T	10-06-1998
		EP 0500761 A	02-09-1992
		ES 2113353 T	01-05-1998
		FI 922082 A	07-05-1992
		GR 3026464 T	30-06-1998
		IL 96220 A	12-04-1994
		JP 4502844 T	21-05-1992
		MX 173030 B	28-01-1994
		NO 304207 B	09-11-1998
		SG 52745 A	28-09-1998
		WO 9107036 A	16-05-1991
		ZA 9008856 A	28-08-1991
US 5101501 A	31-03-1992	AU 646421 B	24-02-1994
		AU 6904191 A	31-05-1991
		CA 2073027 A	08-05-1991
		CN 1051832 A	29-05-1991
		DE 69033402 D	27-01-2000
		EP 0500775 A	02-09-1992
		FI 922081 A	07-05-1992
		IL 96219 A	12-04-1994
		KR 157636 B	16-11-1998
		MX 173031 B	28-01-1994
		NO 304210 B	09-11-1998
		SG 48290 A	17-04-1998
		WO 9107020 A	16-05-1991
		ZA 9008857 A	28-08-1991